


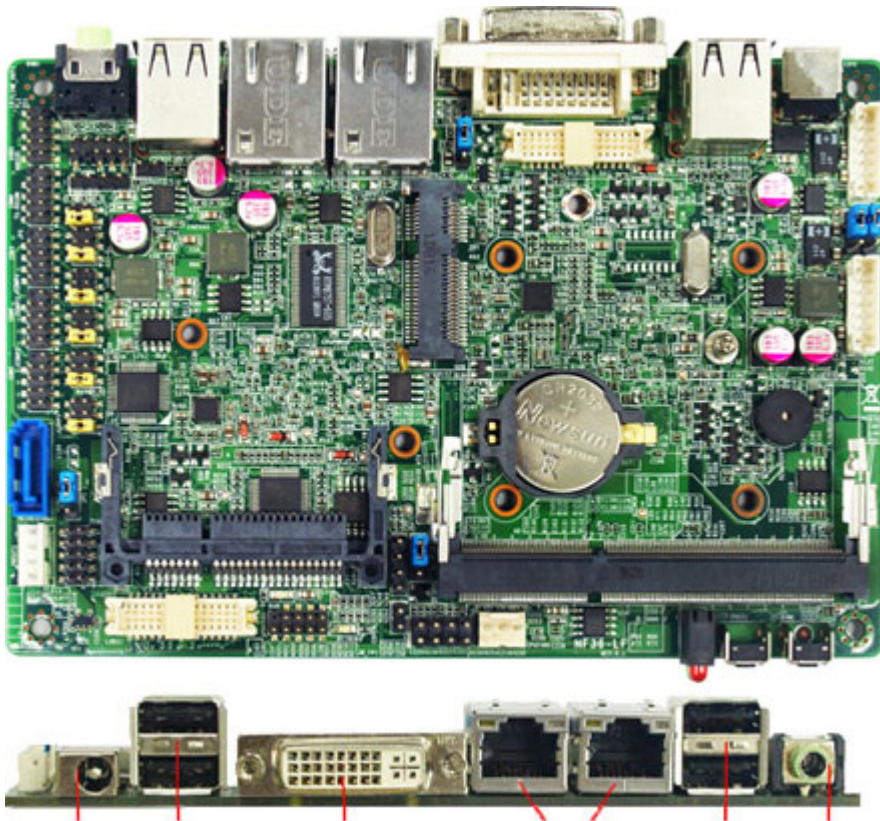

215.00 EUR

incl. 19% VAT, plus [shipping](#)

Support:  [Specifications \[EN\]](#)

- INTEL® Cedar Trail-M Processor N2600 + NM10 Chipset
- Support 1 \* DDR3 800MHz Single CH up to 2GB
- Support DirectX 9 Graphics up to 640MHz
- Support 1 \* Serial ATAII (3Gb/s) Devices
- Support Dual Gigabit LAN
- Support DVI-I Output
- Equipped with 802.11 b/g/n WiFi card & Internal Antenna (JBC362F36W-2600-B only)
- Support 2.5" SATA HDD
- Support Mini PCI-E socket
- Support CFast card socket

|                         |                                                                                                                                                 |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CPU</b>              | INTEL® Cedar Trail-M Processor N2600 (1.6GHz)<br>INTEL® Cedar Trail-M Processor N2800 (1.86GHz)                                                 |
| <b>Chipset</b>          | INTEL®NM10 Express chipset                                                                                                                      |
| <b>Memory</b>           | 1 * DDR3 800MHz Single CH SO-DIMM up to 2GB (For Cedar Trail-M N2600)<br>1 * DDR3 1066MHz Single CH SO-DIMM up to 4GB (For Cedar Trail-M N2800) |
| <b>Expansion Slots</b>  | 1 * MINI PCI-E                                                                                                                                  |
| <b>Storage</b>          | 1 * Serial ATAII 3Gb/s connectors<br>1 * CFast card socket                                                                                      |
| <b>Audio</b>            | Realtek ALC662 HD Audio CODEC with 4-Channel                                                                                                    |
| <b>Ethernet LAN</b>     | 2 * RTL8111E PCI-EVL Gigabit LAN                                                                                                                |
| <b>USB</b>              | Embedded 7 * USB 2.0/1.1                                                                                                                        |
| <b>LVDS</b>             | Onboard 1 * 24-bits Dual channel & 1 * 18-bits Single LVDS connectors<br>4 * USB 2.0/1.1 ports<br>2 * RJ-45 ports                               |
| <b>Rear Panel I / O</b> | Line-out port<br>1 * DVI-I port<br>1 * 12V DC-IN JACK                                                                                           |

**Internal I / O**

2 \* USB 2.0 header for 3 \* USB 2.0 ports

1 \* Audio header

System/Chassis/NB Fan Connectors

1 \* GPIO header

1 \* CFast card reader socket

DIY switch x2 (reset &amp; power button)

4 \* COM header (COM1~3 for RS232, COM4 for RS232/422/485)

**BIOS**

AMI 16MB SMT Flash ROM

**Form Factor**

3.5" SBC form factor (148mmx102mm)

**Certificate**

CE,FCC,RoHS,ERP

**Functional**ATM, Automation, Medical Equipment, Security, General Application, Transportation, Digital Signage,  
Kiosk, POS machine, LCD TV PC, Embedded Fanless application**Temperature**

Operating within 0~60 centigrade

Storage within -20-85 centigrade

**Product Accessories**

- DVI-I to CRT Converter
- Manual
- CD
- 1x SATA cable
- SATA power cable
- 4x COM cable